

# MF 3000

## Mass flow measurement for bulk materials



**HUMY 3000**  
Moisture  
measurement

**MF 3000**  
Mass flow  
measurement

**FS 510M**  
Microwave  
mass flow  
monitoring

**FS 600E**  
Electrostatic  
mass flow  
monitoring

**FS 700E**  
Triboelectric  
dust monitoring

**LC 510M**  
Limit level  
monitoring

## Application and Function


Our solid flow meter MF 3000 is designed for flow measurement in metallic pipes from a few kg/h to many t/h. The system is suitable for on-line measurements of powders, dusts, pellets, and granules from 1 nm up to 2 cm in pneumatic or free fall conditions.

The measurement principle of the MF 3000 is based on the physical Doppler-Effect, whereas the sensor generates a uniform field in the microwave frequency range inside the pipe. These microwaves are being reflected by particles passing through the pipe. Calculation

of frequency and amplitude changes allows for accurate determination of solid flow. Non-moving particles like dust accumulation are excluded from the calculation.

The installation is simple and cost effective via a welded branch, through which the sensor is screwed flush to the inside of the pipe. The sensor is connected to a DIN-rail mounted transmitter with 4...20 mA, RS232 and RS485 output. The calibration is easy by using our MF-SMART software and a reference flow value.


## Main Benefits

- ◆ For pneumatic conveyors and free falling processes
- ◆ For all solid materials from a few kg/h to many t/h
- ◆ No armatures inside the pipe and inside flush fitting
- ◆ Very fast and contactless measurement
- ◆ Easy, quick and cost effective installation and start-up
- ◆ Galvanic separated DIN-Rail Transmitter with RS232- and RS485-Interface
- ◆ Robust stainless steel version, abrasion and maintenance free
- ◆ Limit value monitoring with alarm contact
- ◆ Sensor-transmitter distance up to 2.000 m
- ◆ Easy and quick calibration
- ◆ Adjustable sensitivity
- ◆ Optional: ATEX for Zone 20 and Zone 2 

## Putting into work

A branch is welded onto the pipe. A 18 mm hole is drilled, the sensor is mounted flush with the inner diameter of the pipe. For commissioning and calibration a notebook with our MF-SMART software needed.

Calibration can be performed with either one or multiple reference flow amounts. The measurement value is output either analog or as digital signal. A serial COM interface is available at the front of the transmitter to connect a notebook computer and a RS485 interface for connection to a PLC system.

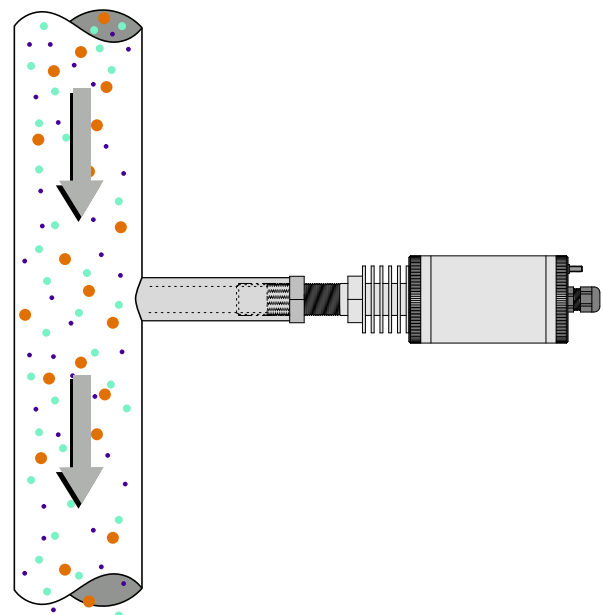

## Application examples of successfully measured products

MF 3000 is measuring in pneumatic transportations and free falling processes. The product's grain size can be between 1 nm and 20mm.

The moisture of the measured material is allowed to be changed up to 12%.

**Materials:**

All dust, powders, granulates, panels, threads etc. Also sticking or abrasive materials

**Industries:**

Animal feed industry  
 Building materials industry  
 Cement industry  
 Chemical industry  
 Detergent industry  
 Engineering companies  
 Food industry  
 Glass production  
 Metal production

**Range of detection:**

from kg/h to many t/h

Pharmaceuticals  
 Pigment production  
 Plastic industry  
 Production of ceramics  
 Production of rubber goods  
 Production of textiles  
 Tobacco industry  
 Washing powder industry


## Applications



**Wood Dust**




**Jet Material**

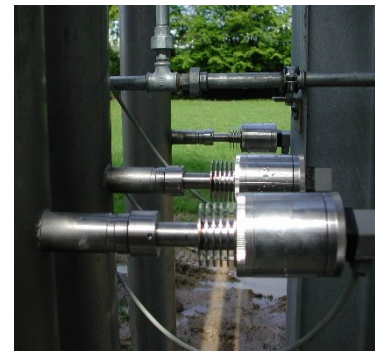

**Plastic Granules**



**Coal Dust**

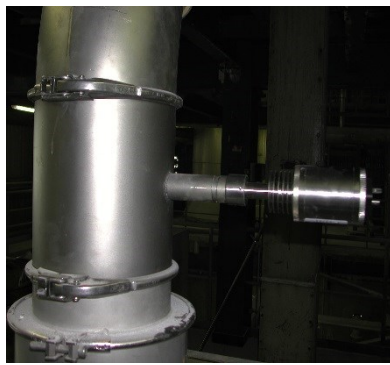

**Fertilizer**



**Iron-II-Sulfate**

**HUMY 3000**  
 Moisture  
 measurement

**MF 3000**  
 Mass flow  
 measurement

**FS 510M**  
 Microwave  
 mass flow  
 monitoring

**FS 600E**  
 Electrostatic  
 mass flow  
 monitoring

**FS 700E**  
 Triboelectric  
 dust monitoring

**LC 510M**  
 Limit level  
 monitoring

### Process Data

#### MF 3000

Measurement start free fall :	Ca. 1 kg/h
Measurement start pneumatic transport	Ca. 1 kg/h
Max. pipe diameter	DN 300 (bigger diameter on request)
Grain size	1 Nanometer up to 20 mm
Moisture	Depending on the product
Pressure	Up to 6 bar (Option up to 30 bar)
Process temperature	-20 up to +90°C (Option up to +750°C)

### Technical Data

#### Sensor


Medium touched parts	Stainl. steel 1.4307 and PA 6.6
Process connecting	Welding flange
Housing material	Stainl. steel 1.4307 or ST52
Protection class	IP 65
Power supply	Via transmitter

### Technical Data


#### Transmitter

Construction	DIN-Rail, 22,5 mm
Auxiliary energy	24 V AC/DC
Power consumption	Max. 2W (+0,3 – 8,5W for thermocouple)
Ambient temperature	-10 to +60°C
Protection class	IP 30

### Communication Unit (Optional)

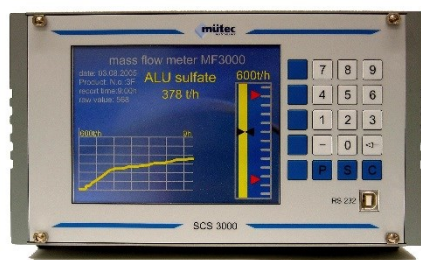


### System components

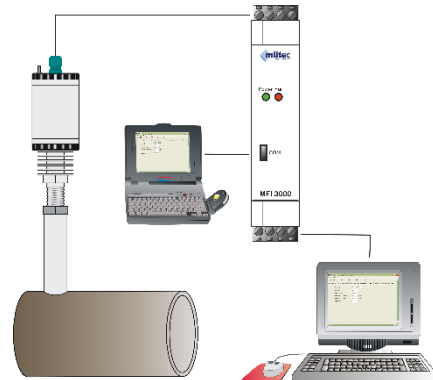

A complete measuring system MF3000 contains the sensor, a cable, a DIN-rail transmitter and the software MF-SMART .

### Sensor

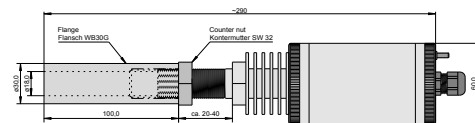

### Transmitter

